

## 20 x 127 mm and 25 x 146 mm, FWK

750 V d.c. (IEC), 5 to 60 A

### Specifications

#### Description

Ferrule style high speed fuse links for the protection of DC common bus, DC drives, power converters/rectifiers and reduced rated voltage starters.

#### Technical Data

Rated voltage: 750 V d.c. (IEC)

Rated current:

- 5-30 A (20 x 127 mm)
- 35-60 A (25 x 146 mm)

Breaking capacity: 50 kA at 750 V d.c., L/R 10-15ms

Operating class: gG


#### Standards / Agency information:

CE.





Fuse link size	Rated voltage	Rated current (Amps)	I <sup>2</sup> t (A <sup>2</sup> Sec)		Watts loss (W)	Catalogue numbers
			Pre-arcing	Clearing at 750 V d.c.		
20 x 127 mm (1 <sup>3</sup> / <sub>16</sub> " x 5")	750 V d.c. (IEC)	5	8.5	16	6.7	FWK-5A20F
		8	50	100	8.8	FWK-8A20F
		10	95	200	8.5	FWK-10A20F
		15	100	240	5	FWK-15A20F
		20	125	315	7.8	FWK-20A20F
		25	400	1100	6.5	FWK-25A20F
		30	800	2600	6.5	FWK-30A20F
25 x 146 mm (1" x 5 <sup>3</sup> / <sub>4</sub> ")	750 V d.c. (IEC)	35	1300	4600	6	FWK-35A25F
		40	1600	5300	6.8	FWK-40A25F
		50	3100	12,000	7.3	FWK-50A25F
		60	5900	24,000	7.7	FWK-60A25F

#### Dimensions - mm (in)

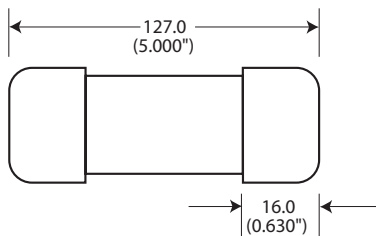

20 x 127 mm 5-30 A

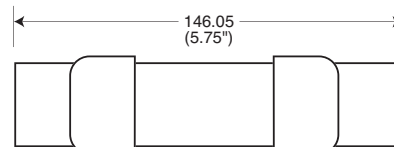

25 x 146 mm 35-60 A

